



# TC-30/60

- 13 mph. (21 km/h) max. speed
- 136 in. (345.4 cm) turning radius
- 30,000-60,000 lb. towing capacity\*



## VERSATILE TOWING SOLUTIONS



The TC-30/60 tow tractor is designed to provide a versatile and highly maneuverable solution for your towing requirements demanding 3,000-6,000 pounds (13.3-26.7 kN) of drawbar pull.

The TC-30/60 is available with multiple engine packages to meet a variety of environmental conditions. The standard unit is equipped with a gas engine, fully welded steel frame, all-wheel suspension with hydroboost, dual caliper rear disc brakes, and tractor style tires. Some customizable options are an enclosed cab or overhead guard, hydrostatic steering, and diesel or LPG engine. This efficient towing vehicle has excellent steering capability and durability that will withstand harsh environments while maintaining operator comfort. Visit our website for additional Tiger tractor images, videos, information, and custom modifications at [taylor-dunn.com](http://taylor-dunn.com).

<b>SPEED</b>	13.0 mph	21 km/h
<b>WHEEL BASE</b>	58.5 in	148.6 cm
<b>TURNING RADIUS</b>	136 in	345.4 cm
<b>OVERALL LENGTH</b>	113 in	287.0 cm
<b>OVERALL WIDTH</b>	55.5 in	140.9 cm
<b>OVERALL HEIGHT</b>	60.0 in	152.4 cm

**\* Based on Standard Configuration**

Actual towing capacity is dependent on application, vehicle configuration, ballast weight, and operating environment.

**Note:** Photos are shown with optional features.

### FEATURES & BENEFITS:


- Hydroboost, dual caliper rear disc brakes
- Fully welded steel frame
- Available in gas, diesel or LPG
- Customizable to fit your application



# TC-30/60


## PERFORMANCE

<b>DRAWBAR PULL</b>	3,000-6,000 lbs	13.3-26.7 kN
<b>MAX SPEED (UNLOADED)</b>	13 mph	21 km/h
<b>TURNING RADIUS</b>	136 in	345.4 cm

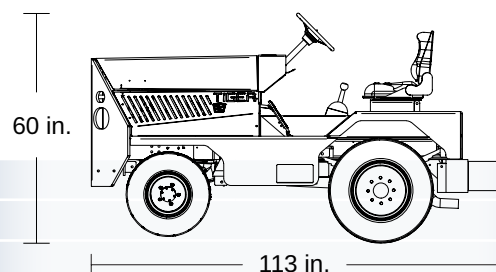

## DIMENSIONS

<b>OVERALL LENGTH</b>	113 in	287.0 cm
<b>OVERALL WIDTH</b>	55.5 in	140.9 cm
<b>OVERALL HEIGHT (less cab)</b>	60.0 in	152.4 cm
<b>OVERALL HEIGHT (with cab)</b>	78.0 in	198.1 cm
<b>WHEEL BASE</b>	58.5 in	148.6 cm
<b>GROUND CLEARANCE</b>	5.00 in	12.7 cm



## GENERAL

<b>UNIT WEIGHT ( lbs. / kg.)</b>	<b>TC-30:</b> 4,200 / 1,905	<b>TC-40:</b> 5,550 / 2,494	<b>TC-50:</b> 6,800 / 3,084	<b>TC-60:</b> 7,800 / 3,538
<b>FUEL SYSTEM</b>	12 Gallon Gas Tank 45.4 L			
<b>TIRES</b>	<b>Front:</b> Load Range E, 6.50X10 2-Pc Wheel <b>Rear:</b> Load Range D, LT 225/75R16 1-Pc Wheel			
<b>SEAT</b>	Driver Vinyl Bucket Type, Adjustable			
<b>INSTRUMENTATION</b>	Engine Coolant Temperature, Engine Oil Pressure, Voltmeter, Fuel Level, Hour Meter			

## POWER SUPPLY / DRIVE TRAIN

<b>ENGINE</b>	Gas, LPG or Diesel
<b>TRANSMISSION</b>	Automatic 3-speed, Neutral Start Interlock Switch

## CHASSIS

<b>FRAME</b>	Fully Welded Steel
<b>STEERING</b>	Manual Steering Gearbox
<b>DRIVE AXLE</b>	Double Reduction Heavy Duty
<b>SUSPENSION</b>	Leaf Springs, Front and Rear
<b>BRAKES</b>	Hydroboost, Dual Caliper Rear Wheel Disc, Hand Operated Drive Line Parking Brake

## ELECTRICAL

<b>ELECTRICAL SYSTEM</b>	12V Negative Ground w/ Heavy-Duty Starter, Alternator and Battery
<b>ELECTRICAL COMPONENTS</b>	Dual Head Lights, Brake/Tail Lights & Reverse Lights, Steering Wheel Horn

## COOLING SYSTEM

<b>ENGINE</b>	Water Cooled
<b>TRANSMISSION</b>	Radiator Cooled

## CONFORMANCE STANDARDS

This vehicle conforms to applicable sections as described in O.S.H.A. Standard Section 1910.178 (Powered Industrial Trucks) and with all applicable portions of the American National Standard for Operator Controlled Industrial Tow Tractors (ANSI B56.9).

## OPTIONS

- CAB OR OVERHEAD GUARD
- HEATER / DEFROSTER
- TURN SIGNALS
- DIESEL OR LPG
- HYDROSTATIC STEERING
- PASSENGER SEAT / SEAT BELT
- FIRE EXTINGUISHER
- SHIFT INHIBITOR
- BEACON LIGHT OR STROBE
- BACK-UP ALARM
- FRONT BRAKES
- VARIOUS HITCHES
- ENGINE SHUTDOWN
- FOAM FILLED TIRES
- CUSTOM PAINT COLOR

Specifications, standard equipment, accessories and modifications are subject to change without notice.